



ZAM Plus Rupture Disk Alarm Monitors


The ZAM series Alarm Monitor is a surface mounted monitor designed to remotely detect the condition of a rupture disk in service. Used in conjunction with the ZOOK ZENSOR®, BA, RDI, BI or similar devices, it will immediately warn the operator of a ruptured disk. The alarm system uses a normally closed electrical circuit. When the disk ruptures, it breaks the circuit, triggering the alarm.

The ZOOK ZAM alarm system is capable of detecting a ruptured disk condition in applications involving highly electrically conductive fluids. Contact ZOOK for more information regarding this type of application.


Features

- Intrinsically safe output for Class I, II, and III, Division 1, Groups A, B, C, D, E, F, and G hazardous locations
- Utilizes FM approved, , , and , compliant I.S. barrier
- Enclosure: NEMA Type 12, constructed of 14 gauge steel with continuously welded seams and oil resistant seals
- Provides an audio/visual signal and an output relay for each channel. Channel will automatically reset once the burst indicating device is replaced or reset
- Audio alarm can be silenced with push button switch
- Contains front panel push buttons for testing each channel. This function can also be performed remotely
- Field replaceable I.S. barrier module and power supply


Specifications		
Intrinsically safe sensing signal level	10.5 VDC @ 13 mA max.	
Input Voltage	100–240 VAC @ 50/60Hz	
Monitor Sensing Level	Open (Ruptured)	
Output Relay Contacts	1NO & 1NC (DPST) rated 4 Amps, 126.5 VAC (Resistive)	
Operating Temperature	–4°F to + 140°F	
Dimensions	ZAM2 & ZAM4	129 H x 109 W x 89 D
	ZAM6 & ZAM8	149 H x 129 W x 89 D

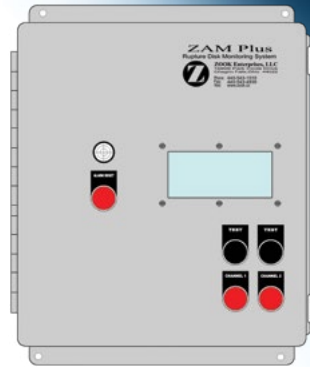


ZAM2
2 Channel Monitor

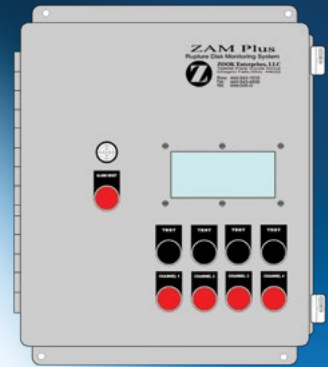

ZAM4
4 Channel Monitor

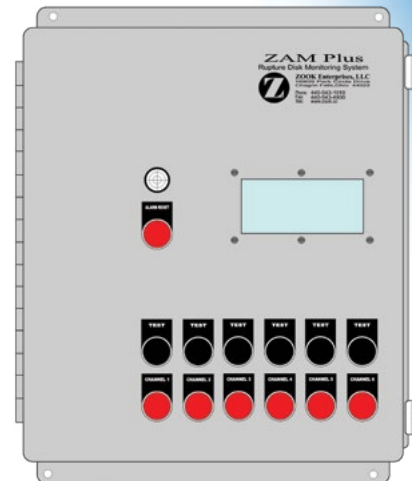

ZAM6
6 Channel Monitor

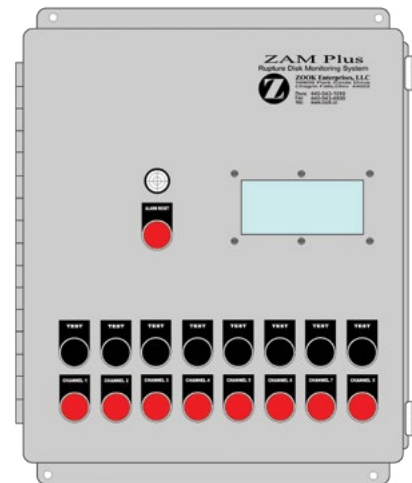

ZAM8
8 Channel Monitor



Rupture Disk Monitor Technical Information


Under normal conditions, the alarm system is in a normally closed state. When the disk ruptures due to an over pressure condition, separation of the membrane (pressure sensing portion of the rupture disk) occurs – breaking the alarm electrical circuit.

The monitor wired to the burst indicating device will be activated providing immediate local or remote warning of a ruptured disk. The ZAM monitor allows output to control pumps, valves, and other equipment which may be activated to control or shutdown a process.

The ZAM Alarm Monitor can be used with the following burst indicating devices: ZENSOR®, BA, RDI, BI or similar devices. It will immediately warn the operator of a ruptured disk.

Contact ZOOK for compatibility with other manufacturers indication devices.

Note: A rupture disk with burst indicating device is considered a simple device, therefore, approval is not required. Installation must be in accordance with ANSI/ISA RP12.6 and the NEC (ANSI/NFPA 70)

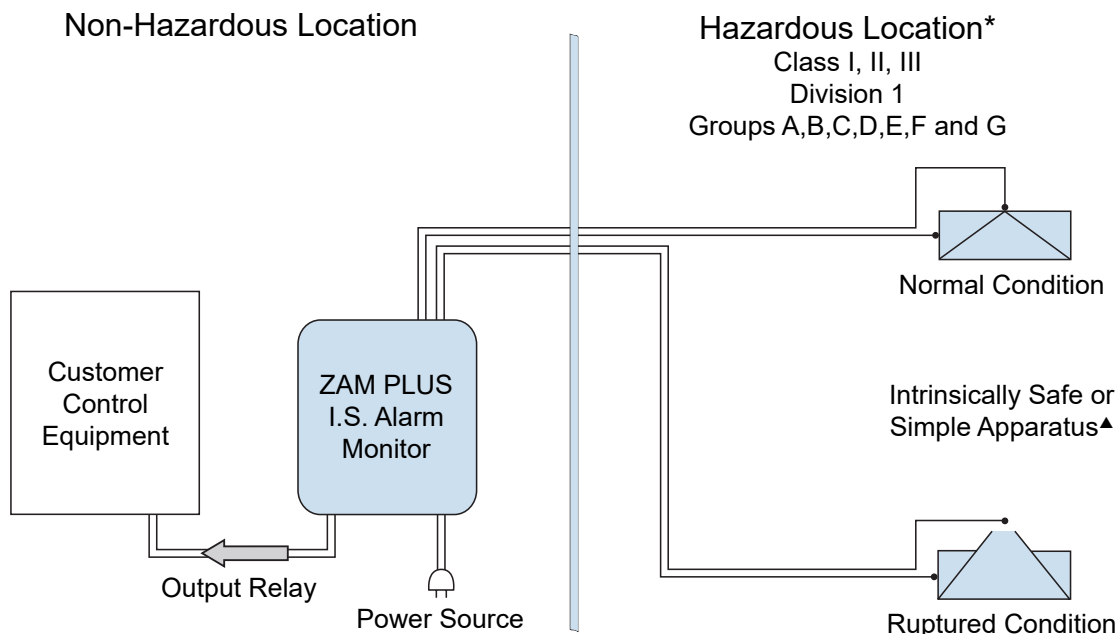

Notes:

*Contact ZOOK for information about mounting the ZAM Plus Alarm Monitor in hazardous locations.

▲Hazardous location equipment must be NEC compliant or simple apparatus.



ZAM-Plus_012018

Visit us at www.zookdisk.com

SERVING AMERICA, CENTRAL & SOUTH AMERICA

16809 Park Circle Drive
Chagrin Falls, Ohio 44022
United States

Toll Free: +1 800 543 1043

Phone: +1 440 543 1010

Fax: +1 440 543 4930

E-mail: sales@zookdisk.com

SERVING EUROPE, MIDDLE EAST & AFRICA

Navigation House, Bridge St.
Killamarsh, Sheffield, S21 1AL
United Kingdom

Phone: +44 (0) 1909 560999

Fax: +44 (0) 1909 560860

E-mail: sales.europe@zookdisk.com

SERVING CANADA

4400 South Service Road
Burlington, Ontario, L7L 5R8
Canada

Toll Free: +1 800 370 6057

Phone: +1 905 681 2885

Fax: +1 905 681 8838

E-mail: sales.canada@zookdisk.com

SERVING ASIA PACIFIC

Unit No. 23A-05, Menara Landmark
No.12, Jalan Ngee Heng
80000 Johor Bahru, Johor,
Malaysia

Phone: +60 (7) 2910099

Fax: +60 (7) 2910096

E-mail: sales.asia@zookdisk.com



Safety through knowledge and performance.