

Type ZLIC 040160 . . . 150200

TECHNICAL DATA

Output:	max. 330 m ³ /h
Head:	max. 60 m
Speed:	max. 3600 rpm
Material:	grey cast iron: 0B, 0C
Temperature:	material design: 0B, 0C, 4B max. 120 °C
Casing pressure:	PN 16 / PN 10 ¹⁾
Shaft seal:	standard mechanical seal
Flange connections:	DIN 2501 PN 16
Sense of rotation:	clockwise, when looking at the pump from the drive end



APPLICATION

Volute pumps of the series ZLIC in inline design have been constructed as space saving and easy to install pumping units with standard motor. The pumps are used when clear resp. turbid liquids without any solid particles have to be pumped without problem.

The combination of:

- performance and connection size according to DIN 24255 /EN 733
- construction type: INLINE design with standard motor
- material: grey cast iron, stainless steel

was leading to widely spread application fields like

- steel, machine and automobile construction
- food and semi-luxuries industry
- chemical and petrochemical industry
- pharmaceutical industry
- lacquer industry
- plastics and rubber industry
- iron and non-ferrous metal industry
- paper and pulp-industry
- textile industry

DESIGN

Single-stage pumping units in compact design with nominal performances according to DIN 24255 / EN 733, where suction and discharge branch are arranged opposite to direct instalment into the pipework.

There is no common shaft for motor and pump. The motors used are of the standard type listed.

Thanks to the process design it is possible to withdraw the whole insert unit without removing the casing of the pump from pipework.

The individual shafts of the unit connected by a plug-in coupling facilitate the dismantling or the replacement of the motor without affecting the pump.

The programme comprises 14 pump sizes at present.

¹⁾ For size 150200 only

CONSTRUCTION

Casing pressure:

Material design	
4B	max. 16 bar from -40 °C to 120 °C
0B, 0C	max. 16 bar from -30 °C to 120 °C

Please note:

Technical rules and safety regulations.
Casing pressure = inlet pressure plus delivery head + zero flow

Flanges location:

Suction and discharge flange radially arranged opposite to each other.

Flanges:

The flanges correspond to DIN 2533 PN 16. Flange drilled ANSI 150 lbs. on request.

Hydraulic:

First hydraulic. Designation of this construction type: A-
Second hydraulic. Designation of this construction type: B-
Third hydraulic. Designation of this construction type: E

Bearing:

Two grease-lubricated antifriction bearings according to DIN 625 in the motor, one antifriction bearing grease-lubricated for service-life according to DIN 625 arranged in the bearing bracket. Designation of this construction type: -K, -V

Sense of rotation:

Clockwise when looking at the pump from the drive end.

Shaft sealing:

The shaft sealing is a single mechanical seal, flushed from internal source, uncooled and unbalanced.

Designation AAE: cast chrome / carbon, O-rings Perbunan temperature range: -40 °C to 120 °C

Designation BH3: SiC / carbon, elastomer EP temperature range: -20 °C to 120 °C

Designation BHS: SiC / SiC, elastomer Viton temperature range: -20 °C to 120 °C

Material design

Item	Components	Material					Execution			
		EN material-number	EN material-denomination	DIN material-number	DIN material-denomination	US denomination		0B	0C	4B
						ASTM Standard	AISI			
10.10	Volute casing	EN-JL 1040	EN-GJL 250	0.6025	GG 25	A 278 Class 30		X	X	
16.10	Casing cover	1.4408	GX5CrNiMo19-11-2	1.4408	GX6CrNiMo18 10	A 351 CF8M	316			X
34.00	Bearing bracket	EN-JL 1040	EN-GJL 250	0.6025	GG 25	A 278 Class 30		X	X	X
21.00	Shaft	1.4021	X20 Cr13	1.4021	X20 Cr13	A 276 Type 420	420	X	X	
		1.4401	X5CrNiMo18 10	1.4401	X5CrNiMo18 10	A 167 Gr316	316			X
23.00	Impeller	EN-JL 1040	EN-GJL 250	0.6025	GG 25	A 278 Class 30		X		
		2.1050	CC480K	2.1050	G-CuSn10	B 427 C91600			X	
		1.4408	GX5CrNiMo19-11-2	1.4408	GX6CrNiMo18 10	A 351 CF8M	316			X
43.30	Shaft seal	X22CrNi17 / Carbon - Perbunan						X	X	
	Mechanical seal ¹⁾	SiC / SiC - Viton or SiC / carbon - EP						X	X	X

¹⁾ O-rings of PTFE upon request;

Casing seal:

Material design 0B, 0C: The casing is sealed by a flat gasket of EWP 210. Designation of this construction type: 2
 Material design 4B: The casing is sealed by a flat gasket of PTFE. Designation of this construction type: 4

Motor power:

Using commercial electric motors, type of construction IM B5 resp. IM V 1

To determine the drive power we recommend the following safety margin:

up to 4 kW: 25 % 4 up to 7,5 kW: 20 % 7,5 up to 37 kW: 15 %

Please note: the max. motor power allowed for some construction sizes as shown in the individual characteristic curves.
 The following speeds are to be observed:


Max. speed rpm	Size	Max. speed rpm	Size	Max. speed rpm	Size
3600	040160 040200 050160 050200 065160 065200 080160 080200 ²⁾ 100160 ²⁾	3000	100200 150200A	1800	150200E

The max. speeds results from the admissible shaft load and from the permitted peripheral speed of the impellers.


²⁾ in material design 4B max. speed 3000 rpm

Positioning

ZLIC pumps can be mounted either horizontally or vertically into the pipe system with sufficient carrying capacity as follows, taking the drive power into consideration:



Horizontal installation up to 7,5 kW



Vertical installation up to 7,5 kW possible, from 11 kW on necessity.
 The pump unit can be additionally supported for that. For this particular purpose a threaded bore hole is provided in the pump casing (see dimension table).


Please note

The installation of the motor below the pump is not allowed because of operation safety reasons.
 The installation of compensators is not necessary. **Saving of costs!**

General comments


For units in compact design with the same installation set consisting of bearing bracket with bearing, stub shaft and mechanical seal, casing cover, impeller and impeller fastener, please refer to our series **ZLKD**. Technical documentation about these programmes will be readily supplied on request.

Sectional drawing and nomenclature

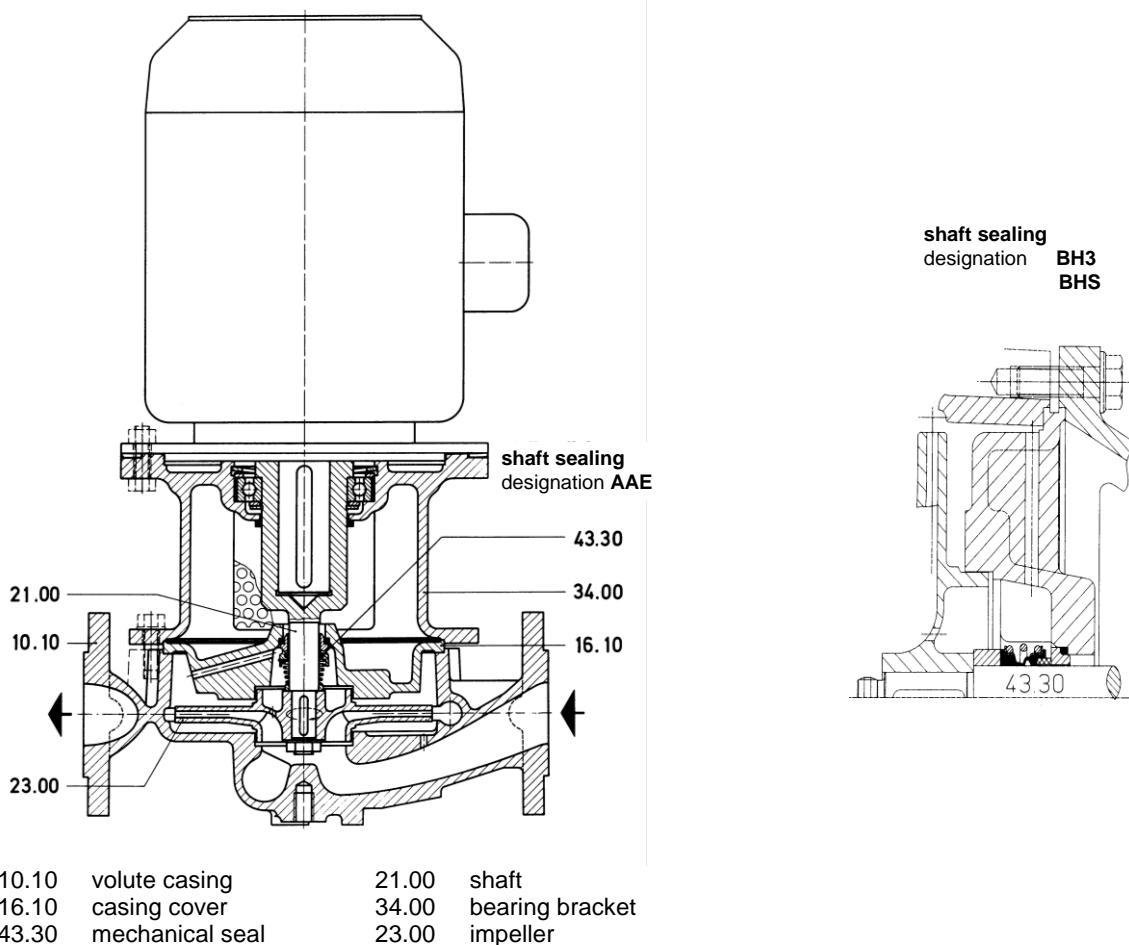

Standard set of components / bearing bracket - plug coupling / standard motor* / space requirement

By supplementing the standard set of components consisting of pump casing, casing cover, impeller and mechanical seal by a special bearing bracket (DBP) results an inline pumps which is easy to combine. The bearing bracket removes the standard motor from the load of hydraulic forces and allows suitable motor combinations at the complete mounted pumping unit.

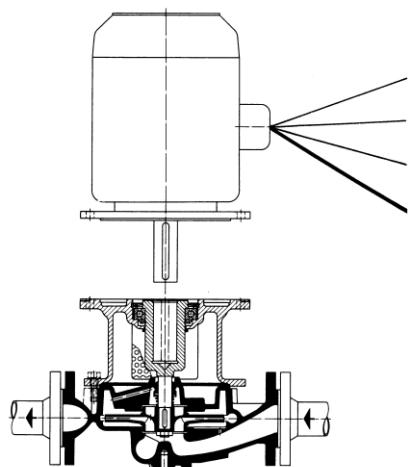

motor combinations

- + type IM B 5 or IM V 1
- + type of enclosure IP 55 to ell (Ex)
- + speed 50 and 60 Hz
- = motor at your choice

- + shaft sealed pumping unit

- = readiness for operation


* shaft end key

to DIN 748 part 3
to DIN 6885 sheet 1


If necessary the motor can be changed in the unit without draining, the pipework. The pump unit remains as „**shaft tight armature**“ in the pipe work and so the readiness for operation is increased.

Performance graph


n = 1450 rpm

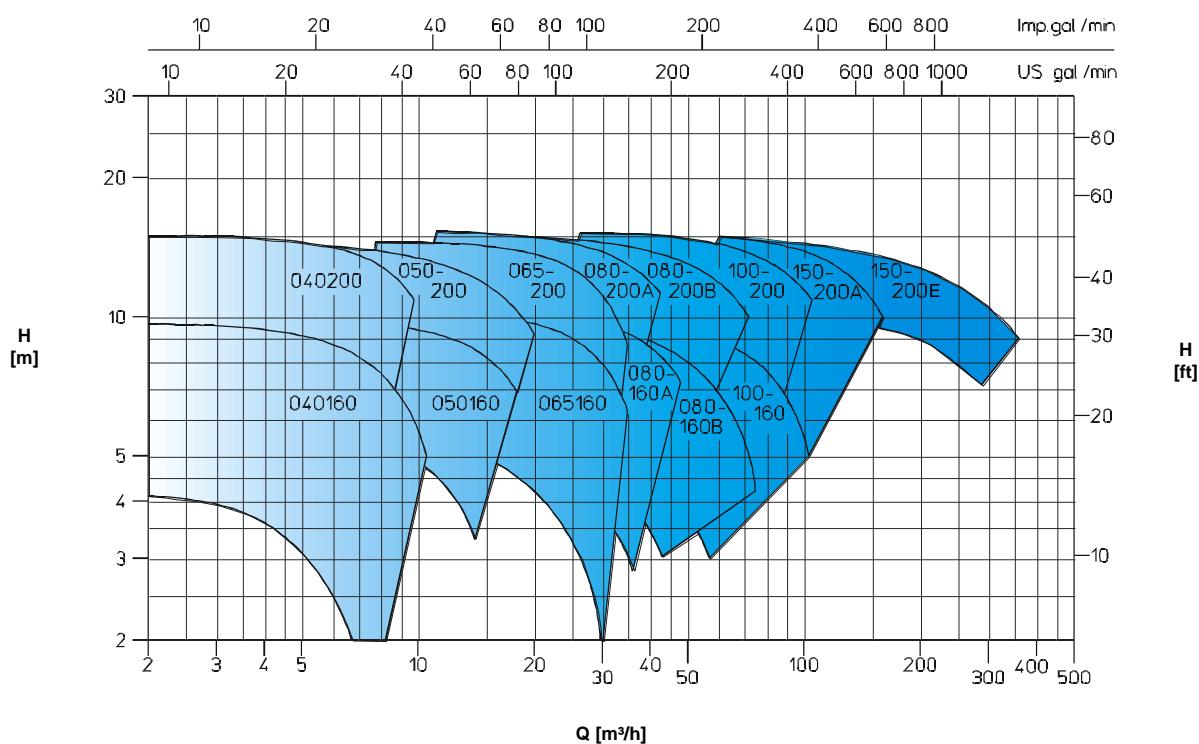

n = 2900 rpm

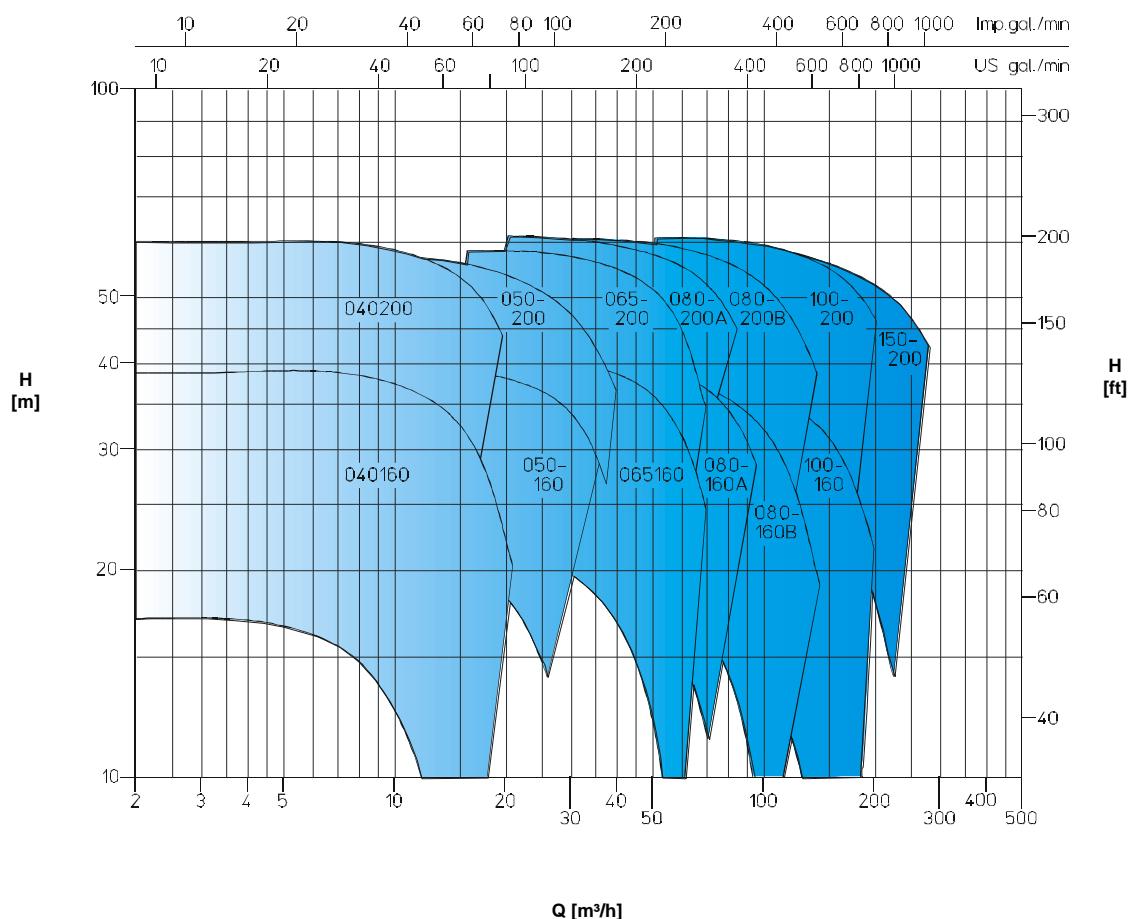

Dimension table

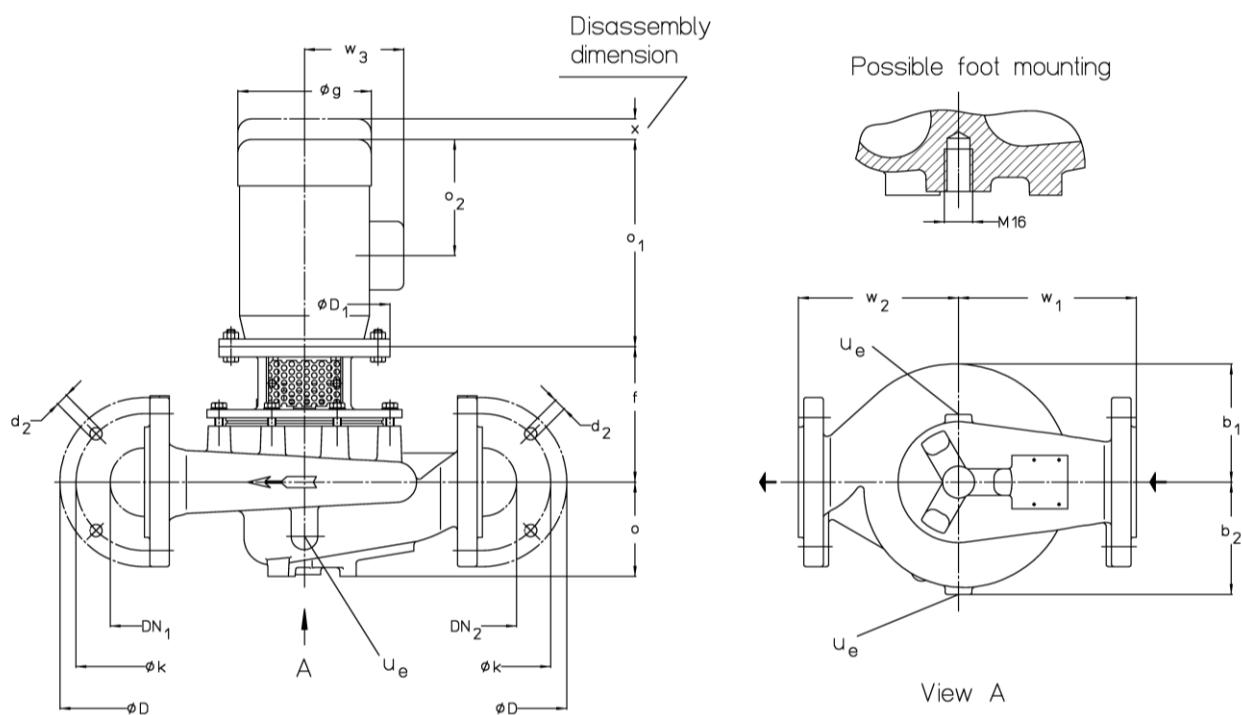

u_e = connection for drainage G 3/8

$n = 1450 \text{ rpm}$

Size	Motor		DN _{1,2}	b ₁	b ₂	D ₁	f	g [*]	o	o ₁ [*]	o ₂ [*]	w ₃ [*]	w ₁	w ₂	x	Weight abt. kg		
	Size	kW														Pump 0B,0C	Pump 4B	Motor
040160	80	0,55	40	113	114	200	167	82	175	253	178	133	180	160	80	36	37	10
	80	0,55		133	127				190	298	220	140	200	180		43	47	
040200	80	0,75	50	121	119	167	175	90	253	178	133	190	160	80	200	180	11	
	90 S	1,1		138	138		190		298	220	140	200	180		44	47		
050160	80	0,55	65	132	127	167	175	106	253	178	133	190	160	215	200	180	15	
	80	0,75		147	143		190		298	220	140	210	170		42	48		
050200	90 S	1,1	80	147	143	250	190	136	298	220	140	210	170	215	200	180	17	
	90 L	1,5		150	136		175		325	229	170	175	133		48	52		
065160	80	0,75	80	139	120	200	190	150	253	178	133	240	200	215	200	180	11	
	90 S	1,1		150	136		210		298	220	140	210	170		40	46		
065200	90 S	1,1	100 L	147	143	250	190	136	325	229	170	255	225	215	200	180	15	
	90 L	1,5		150	136		210		325	229	170	210	170		45	49		
080160 A	80	0,75	100 L	139	120	200	175	150	253	178	133	240	200	215	200	180	17	
	90 S	1,1		150	136		190		298	220	140	210	170		40	46		
080200 A	90 L	1,5	100 L	150	136	250	210	136	325	229	170	255	225		45	49		
	100 L	2,2		150	136		210		325	229	170	210	170		45	49		
080160 B	90 S	1,1	100 L	148	137	200	190	150	298	220	140	240	200	215	200	180	15	
	90 L	1,5		148	137		210		298	220	140	210	170		50	53		
080200 B	90 L	1,5	100 L	155	137	200	190	150	298	220	140	240	200	215	200	180	17	
	100 L	2,2		155	137		210		298	220	140	210	170		51	54		
100160	90 L	1,5	100 L	165	137	200	190	150	298	220	140	240	200	215	200	180	17	
	100 L	2,2		165	137		210		298	220	140	210	170		52	61		
100200	100 L	3,0	100 L	165	137	200	190	150	325	229	170	240	200	215	200	180	24	
	112 M	4,0		165	137		210		325	229	170	210	170		45	49		
100200	132 S	5,5	100 L	180	162	250	183	150	298	220	140	240	200	215	200	180	28	
	112 M	4,0		180	162		183		298	220	140	210	170		50	53		
150200 A	132 S	5,5	100 L	203	173	250	183	150	325	229	170	240	200	215	200	180	36	
	132 M	7,5		203	173		226		325	327	195	350	248		350	280		
150200 E	160 M	11,0	100 L	240	195	250	256	230	350	400	250	545	400	215	200	180	49	
	160 L	15,0		240	195		350		350	327	195	545	400		400	315		

Size	Motor		DN _{1,2}	b ₁	b ₂	D ₁	f	g*	o	o ₁ *	o ₂ *	w ₃ *	W ₁	W ₂	x	Weight abt. kg		
	Size	kW														Pump 0B,0C	Pump 4B	Motor
040160	90 L	2,2	40	113	114	200	167	190	82	298	220	140	180	160		36	37	18
	100 L	3,0				250	162	210		325	229	170						24
	112 M	4,0				167	236			350	248	180						41
040200	112 M	4,0	50	133	127	300	210	275	90	435	327	195	200	180		43	47	56
	132 S	5,5				300	210	275		325	229	170						59
	132 S	7,5				350	275			350	248	180						110
050160	100 L	3,0	65	121	119	250	162	210	106	325	229	170	190	160		40	42	24
	112 M	4,0				300	236			435	327	195						41
	132 S	5,5				350	275			545	400	250						56
050200	132 S	7,5	80	138	138	300	335		210	350	248	180	200	180		44	47	59
	132 S	11,0				350	335			435	327	195						110
	112 M	4,0				250	236			545	400	250						41
065160	132 S	5,5	80	132	127	300	275		106	350	248	180	200	180		42	48	56
	132 S	7,5				350	335			435	327	195						59
	160 M	11,0				300	275			545	400	250						110
065200	132 S	7,5	80	147	143	300	335		210	435	327	195	215	200		48	52	59
	160 M	11,0				350	335			545	400	250						110
	160 M	15,0				350	335			435	327	195						112
080160 A	132 S	5,5	80	139	120	300	275	150	210	435	327	195	240			40	46	56
	132 S	7,5				350	335	136		545	400	250						59
	160 M	11,0				350	335	136		435	327	195						110
080200 A	160 M	11,0	80	150	136	300	275	150	210	545	400	250	255	225		45	49	112
	160 M	15,0				350	335	150		545	400	250						135
	160 L	18,5				350	335	150		600	450	275						250
080160 B	132 S	7,5	80	148	137	300	335	150	210	545	400	250	240	200		50	53	59
	160 M	11,0				350	335	150		545	400	250						110
	160 M	15,0				350	335	150		600	450	275						112
080200 B	160 M	15,0	80	165	155	300	380	150	210	600	450	275	255	225		51	54	135
	160 L	18,5				350	380	150		673	488	300						250
	180 M	22,0				400	415	150		673	488	300						260
100160	160 M	11,0	100	145	145	350	335	150	226	545	400	250	275	250		52	61	110
	160 M	15,0				350	335	150		545	400	250						112
	160 L	18,5				350	380	150		600	450	275						135
100200	160 L	18,5	100	180	162	350	380	150	226	673	488	300	275	250		63	68	155
	180 M	22,0				400	415	188		600	450	275						250
	200 L	30,0				400	415	188		673	488	300						260
150200A	180 M	22,0	150	203	173	350	380	188	226	600	450	275	350	280	120	78	84	155
	200 L	30,0				400	415	188		673	488	300						250
	200 L	37,0				400	415	188		673	488	300						260

Flange connections to DIN 2501 PN 16

DN _{1,2}	40	50	65	80	100	150
k	110	125	145	160	180	240
D	150	165	185	200	220	285
d ₂ x number	18 x 4	18 x 4	18 x 4	18 x 8	18 x 8	23 x 8

Standard motors as per DIN 42677.
Truth of rotation, centricity and right angle of shaft ends and mounting flanges to DIN 42955, normal precision.

* Motors protection type IP 55
Dimensions depend on the motor make

Data regarding pump size

Type	Pump size	Hydraulic + Bearing	Shaft sealing	Material design	Casing seal
		A ▪ First hydraulic B ▪ Second hydraulic E ▪ Third hydraulic ▪ K, V Two grease-lubricated antifriction bearings in the motor. One grease-lubricated antifriction bearing in the bearing bracket.	AAE: Standard mechanical seal, O-rings Perbunan BH3: Unbalanced mechanical seal, SiC-Carbon, elastomer EPDM bellows. BHS: Unbalanced mechanical seal, SiC/SiC, elastomer Viton bellows.	0B: Main parts of cast iron GG25. 0C: Main parts of cast iron GG25, Bronze G-CuSn10 4B: Main parts of stainless steel 1.4408	2: Confined flat gasket of EWP 210. 4: Confined flat gasket of PTFE.
			AAE, BH3, BHS	0B 2	0C 2
			BH3, BHS	--	--
ZLIC	040160 040200 050160 050200	AV			4B 4
ZLIB	065160 065200				
ZLIC	080160 080200 080160 080200	BV			
	100160 100200				
	150200	AK			
		EV			

Applicable motors please take from the dimension table

Motor selection table					
n = 2900 rpm			n = 1450 rpm		
kW	Size	Designation	kW	Size	Designation
0,75	80	FA	0,55	80	FB
1,1	80	GA	0,75	80	GB
1,5	90 S	HA	1,1	90 S	HB
2,2	90 L	JA	1,5	90 L	JB
3,0	100 L	KA	2,2	100 L	KB
4,0	112 M	MA	3,0	100 L	LB
5,5	132 S	NA	4,0	112 M	MB
7,5	132 S	OA	5,5	132 S	NB
11,0	160 M	SA	7,5	132 M	PB
15,0	160 M	TA	11,0	160 M	SB
18,5	160 L	UA	15,0	160 L	UB
22,0	180 M	VA	---	---	---
30,0	200 L	XA			
37,0	200 L	YA			

Designs are subject to amendment without prior notice.

Sterling SIHI (Spain), S.A.

Vereda de los Zapateros s/n, Pozuelo de Alarcón 28223 Madrid, Spain.
Telephone +34 91 709 1310 Telefax +34 91 715 9700. E-mail sihi@sihi.es