



D Series Forward-Acting Composite Rupture Disks

Features

- State-of-the-art laser slotted metal top section
- Forward-acting, tension-loaded design
- Metal or TFE seal
- Fragment resistant design
- Operating pressures to 80% of the disk's marked burst pressure
- Seat Configuration: Angular 30°
- Sizes 1/2" thru 24" diameters
- Burst ratings 3 to 2500 psig
- Temperature ratings to 900°F (482°C)
- Suitable for liquid, gas or 2-phase flow
- 3-dimensional stainless steel tag is standard
- ASME UD marking available




Options


Vacuum Supports are required on vacuum services. Vacuum supports are attached to the process side of the disk and allow the disk to support a full system vacuum. Contact ZOOK if back pressures are in excess of 15 psig or cycling is present

Protective Rings are recommended with D Series Disks to protect delicate materials and/or to provide stability

Seal / Liners the design of the D Series allows the use of highly corrosive-resistant seal materials. A wide variety of metal and TFE seal materials are available

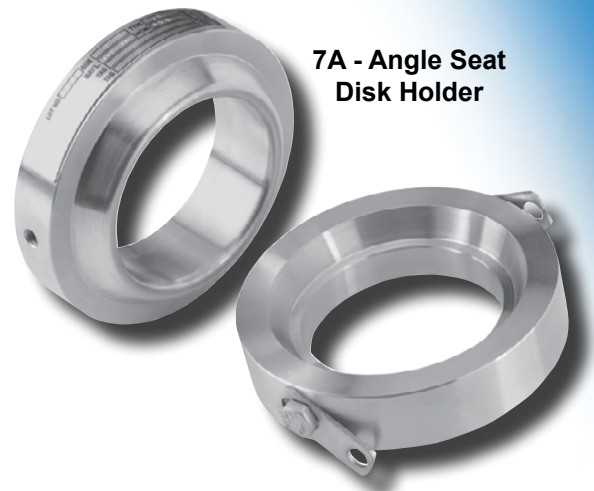

7A - Angle Seat Disk Holder

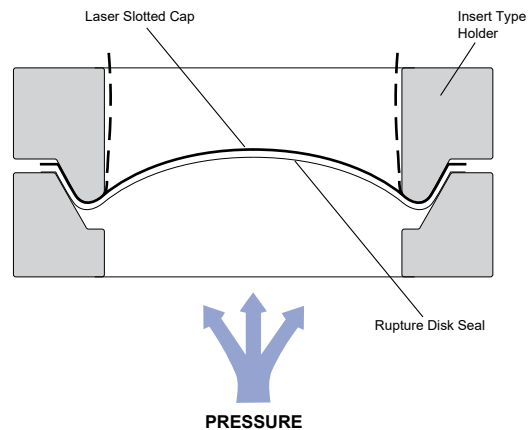

D Series Disks mount with the concave surface facing the process media. The laser cut determines the burst rating of the disk. When the D Series Disk ruptures, it opens along the predetermined pattern and folds back against the holder.

D	Slotted metal top section and a TFE or metal seal
D-R	D Disk with a protective bottom ring
R-D-R	D Disk with a top and bottom protective ring
D-V	D Disk with a bottom vacuum support
TL-D	D Disk with a PFA seal and top liner
TL-D-V	TL-D Disk designed to withstand full vacuum



D Series Specifications

**Table 1 - D Series Minimum and Maximum Pressure Ratings
psig (bar) @ 72°F (22°C)**

Type D, D-R, R-D-R, D-V, R-D-V							
Disk Size	Top Section 316SS, Nickel, Inconel or Monel						Maximum Burst Pressures (Any Seal)
	Minimum Burst Pressures with Listed Seal Materials						
	TFE	Aluminum	Nickel	Monel	Inconel	316SS	
1/2"	90	140	540	600	880	1100	2500
12.70 mm	6.21	9.66	37.24	41.38	60.69	75.86	172.41
3/4"	60	110	440	460	700	800	2500
19.05 mm	4.14	7.59	30.34	31.72	48.28	55.17	172.41
1"	25	60	185	240	300	400	2500
25 mm	1.72	4.14	12.76	16.55	20.69	27.59	172.41
1-1/2"	20	35	125	155	200	275	2000
40 mm	1.38	2.41	8.62	10.69	13.79	18.97	137.93
2"	15	25	80	90	120	165	1500
50 mm	1.03	1.72	5.52	6.21	8.28	11.38	103.45
3"	10	15	55	70	95	125	1000
80 mm	0.69	1.03	3.79	4.83	6.55	8.62	68.97
4"	8	12	40	50	75	90	900
100 mm	0.55	0.83	2.76	3.45	5.17	6.21	62.07
6"	6	10	35	40	60	75	700
150 mm	0.41	0.69	2.41	2.76	4.14	5.17	48.28
8"	5	8	25	35	40	60	600
200 mm	0.34	0.55	1.72	2.41	2.76	4.14	41.38
10"	4	7	22	30	30	45	500
250 mm	0.28	0.48	1.52	2.07	2.07	3.1	34.48
12"	3	7	19	25	25	40	400
300 mm	0.21	0.48	1.31	1.72	1.72	2.76	27.59
Max. Temp.	500°F (260°C)	600°F (316°C)	800°F (427°C)	900°F (482°C)	900°F (482°C)	900°F (482°C)	

Note: For sizes, burst ratings and temperatures not shown, contact ZOOK.

MONEL - TM Huntington Alloys
INCONEL - TM International Nickel

**Table 2 - TL-D Series Minimum and Maximum Pressure Ratings
psig (bar) @ 72°F (22°C)**

Disk Size	TL-D		TL-D-V			
	Top Section 316SS, Nickel, Inconel or Monel		Top Section			
			316SS		Nickel	
	Seal Material: TFE		Seal Material: TFE		Seal Material: TFE	
	min.	max.	min.	max.	min.	max.
1"	50	1000	80	1000	80	600
25 mm	3.45	68.97	5.52	68.97	5.52	41.38
1-1/2"	40	700	75	700	75	450
40 mm	2.76	48.28	5.17	48.28	5.17	31.03
2"	25	550	35	550	35	395
50 mm	1.72	37.93	2.41	37.93	2.41	27.24
3"	20	450	25	450	25	315
80 mm	1.38	31.03	1.72	31.03	1.72	21.72
4"	15	410	18	410	18	300
100 mm	1.03	28.28	1.24	28.28	1.24	20.69
6"	10	320	14	320	14	225
150 mm	0.69	22.07	0.97	22.07	0.97	15.52
8"	7.5	290	11	290	11	200
200 mm	0.52	20.00	0.76	20.00	0.76	13.79
10"	5	240	8	240	8	160
250 mm	0.34	16.55	0.55	16.55	0.55	11.03
12"	5	200	8	200	8	140
300 mm	0.34	13.79	0.55	13.79	0.55	9.66
Max. Temp.	500°F (260°C)		500°F (260°C)		500°F (260°C)	

Note: For sizes, burst ratings and temperatures not shown, contact ZOOK

**Table 3 - Manufacturing Range /
Burst Tolerance - psig (barg) @ 72°F (22°C)**

Specified Burst Rating psig (bar)	Manufacturing Range		Burst Tolerance
	Minus	Plus	
2.5 (0.17) to below 4 (0.28)	1	1	▲
4 (0.28) to below 7 (0.48)	1	2	
7 (0.48) to below 11 (0.76)	1.5	2.5	
11 (0.76) to below 15 (1.03)	2	3	
15 (1.03) to below 17 (1.17)	2	3	
17 (1.17) to below 26 (1.79)	2	4	+/- 2 psi (0.14 bar)
26 (1.79) to below 40 (2.76)	3	5	
40 (2.76) to below 66 (4.55)	4	6	
66 (4.55) to below 101 (6.97)	5	9	
101 (6.97) to below 151 (10.41)	6	12	
151 (10.41) to below 201 (13.86)	9	16	+/- 5%
201 (13.86) to below 351 (24.21)	12	23	
351 (24.21) to below 500 (34.48)	15	30	
Over 500 (34.48)	3%	6%	

Notes:

- ▲ Contact ZOOK
- 1/2, 1/4, and 0% manufacturing ranges are available
- Burst tolerances are the maximum expected variation from the marked burst rating on disk tag



D_012018

Visit us at www.zookdisk.com

SERVING AMERICA, CENTRAL & SOUTH AMERICA

16809 Park Circle Drive
Chagrin Falls, Ohio 44022
United States

Toll Free: +1 800 543 1043
Phone: +1 440 543 1010
Fax: +1 440 543 4930
E-mail: sales@zookdisk.com

SERVING EUROPE, MIDDLE EAST & AFRICA

Navigation House, Bridge St.
Killamarsh, Sheffield, S21 1AL
United Kingdom

Phone: +44 (0) 1909 560999
Fax: +44 (0) 1909 560860
E-mail: sales.europe@zookdisk.com

SERVING CANADA

4400 South Service Road
Burlington, Ontario, L7L 5R8
Canada

Toll Free: +1 800 370 6057
Phone: +1 905 681 2885
Fax: +1 905 681 8838
E-mail: sales.canada@zookdisk.com

SERVING ASIA PACIFIC

Unit No. 23A-05, Menara Landmark
No.12, Jalan Ngee Heng
80000 Johor Bahru, Johor,
Malaysia

Phone: +60 (7) 2910099
Fax: +60 (7) 2910096
E-mail: sales.asia@zookdisk.com



Safety through knowledge and performance.